

## ARIZONA 4 (AR-21041)



### Product description

Top Ø160 mm - IK07



microVos™

### Luminaire Structure


- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear acrylic PMMA diffuser
- Integral control gear

### Optic




G

### Product colour

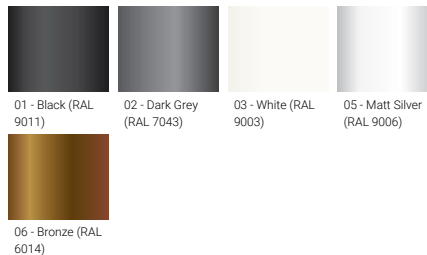

### Special finishes upon request

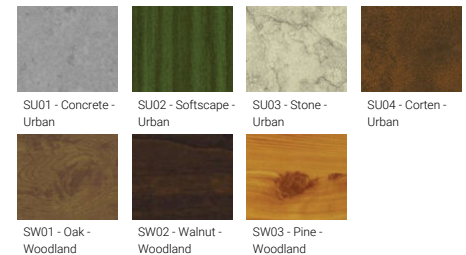


## ARIZONA 4 (AR-21041)

### Technical information

|                      |                       |                          |                                                                                                                                                                      |                                 |                                                                                                                 |
|----------------------|-----------------------|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|-----------------------------------------------------------------------------------------------------------------|
| <b>Material</b>      | Aluminium             | <b>Optic value</b>       | 360°                                                                                                                                                                 | <b>Operating temperature</b>    | -20 °C to 40 °C                                                                                                 |
| <b>Light source</b>  | 1 COB                 | <b>CCT / CRI</b>         | 3000K CRI80, 4000K CRI80                                                                                                                                             | <b>EPA (m2)</b>                 | 0.122                                                                                                           |
| <b>Power</b>         | 28 W                  | <b>Bug</b>               | B1-U3-G0                                                                                                                                                             | <b>Cable</b>                    | One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable                                              |
| <b>Lumen</b>         | 1707 - 1826 lm        | <b>ULR</b>               | 4%                                                                                                                                                                   | <b>Through wiring</b>           | Single cable entry                                                                                              |
| <b>Efficacy</b>      | 61 - 65 lm/W          | <b>ULOR</b>              | 4%                                                                                                                                                                   | <b>Lens / Reflector / Optic</b> | High-efficiency optical reflector, Clear acrylic PMMA diffuser                                                  |
| <b>Driver option</b> | Integral control gear | <b>CIE flux code n°3</b> | 99                                                                                                                                                                   | <b>MacAdam Ellipse</b>          | 3 SDCM                                                                                                          |
| <b>Driver</b>        | Constant current (CC) | <b>Dimming type</b>      | On/Off, 1-10V, DALI                                                                                                                                                  | <b>Lifetime L90B10 (hours)</b>  | > 61,000                                                                                                        |
| <b>Input voltage</b> | 220-240 V 50/60 Hz    | <b>Product colours</b>   | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland | <b>Variants (On/Off, 1-10V)</b> | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |
| <b>Optic</b>         | G                     | <b>Weight</b>            | 5.6 kg                                                                                                                                                               |                                 |                                                                                                                 |

### AR-21041

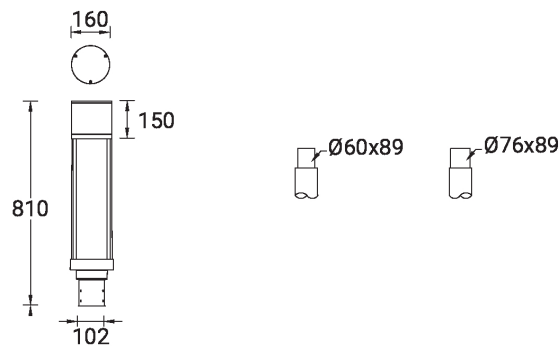

**ARIZONA 4** (AR-21041)

**Accessory**

---



DALI Control System  
**Control-DALI**

---