

LED COB

min 11W <-> max 22W

min 1980lm <-> max 4295lm

CRI 80

2700K | 3000K | 4000K

ELECTRONIC EQUIPMENT

On/Off

DALI-2

BEAM ANGLE

>70°

PROTECTION

IP65

IK10


INSTALLATION OPTIONS

Surface-mounted

Pendant with metal rod

Pendant with stainless steel cord

Pendant in catenary system

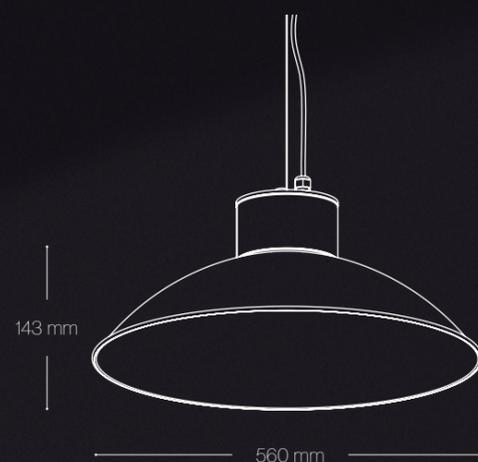

Adhara Outdoor

With its large diameter lampshade, Adhara offers uniform and diffuse lighting.

Its domed design embraces the space with soft and gentle light.

