

LED COB

min 11W <> max 22W

min 1980lm <> max 4235lm

CRI 80

2700K | 3000K | 4000K

ELECTRONIC EQUIPMENT

On/Off

DALI-2

BEAM ANGLE

40° - 70°

PROTECTION

IP65

IK10


INSTALLATION OPTIONS

Surface-mounted

Pendant with metal rod

Pendant with stainless steel cord

Pendant in catenary system

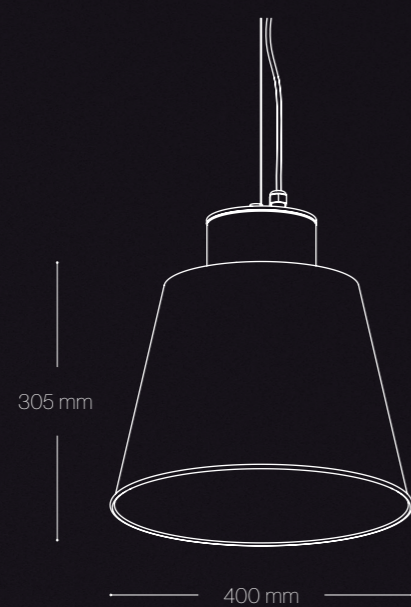

Alnair Outdoor

Alnair is synonymous with impeccable presence and strength.

This luminaire is ideal for lighting large spaces and helps to create unique experiences in outdoor areas.

