

LED COB

min 11W <> max 22W

min 1620lm <> max 4295lm

CRI 80 | CRI 90

2700K | 3000K | 4000K

LED RETROFIT (lamp not included)

max 15W

Lampholder E27

ELECTRONIC EQUIPMENT

On/Off

DALI-2

Driver not required

BEAM ANGLE

40° - 70°

Depending on the lamp

PROTECTION

IP20


INSTALLATION OPTIONS

Surface-mounted

Pendant with a recessed base

Pendant with ceiling rose

Pendant with three-phase track adapter

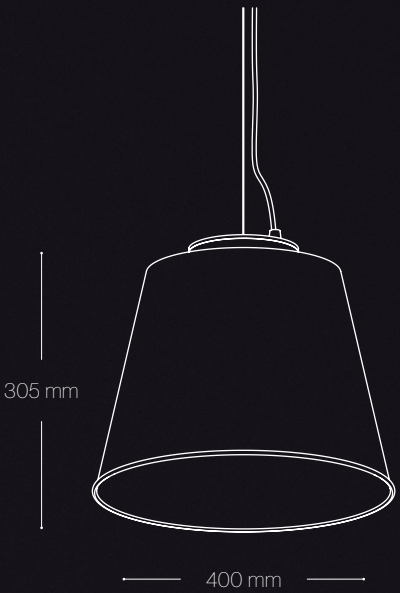

Alnair

A versatile design that transforms any space by offering focused lighting and personality in contemporary spaces.