


A modern, high-performing Track mounted spot light suitable for commercial, retail and residential applications. Die cast aluminium body with a high efficiency clear polycarbonate lens. High quality LED technology ensures the luminaire's long life while maintaining colour quality.



OPTIONAL ON-BOARD DIMMER

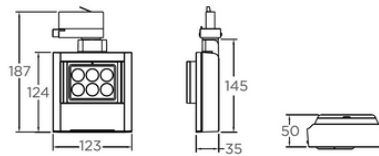

### MECHANICAL

Installation	3-Circuit Track
Housing Material	Aluminium
Lens Material	PMMA Lens
Ingress Protection	IP20
Luminaire Rotate	355°
Luminaire Tilt	90°

### ELECTRICAL

Driver Included	Yes
Voltage Input	230V AC

### LIGHT SOURCE

LED Manufacturer	Cree
Beam Angle	10°, 25°, 40° or 60°
Luminaire Power	15-20W
Colour Rendition (CRI)	Ra 90
Colour Consistency	SDCM 3
Lifetime	L90 B10 60,000hrs



### CODE GENERATION

	LUMINAIRE	POWER	OPTIC	CCT	COLOUR	DIMMING
CODE	EL6	20	10	W30	B	T
REQUIREMENTS	ELLIE 6	20W	10°	3000K	BLACK	TRAILING EDGE

COMPLETE CODE = EL6-20-10-W30-B-T

### LUMINAIRE OPTIONS

POWER	CODE	OPTIC	CODE	CCT	CODE	COLOUR	CODE	DIMMING	CODE
15W	15	10°	10	2700K	W27	WHITE	W	TRAILING EDGE	T
20W	20	25°	25	3000K	W30	BLACK	B	DALI*	D
		40°	40	4000K	W40	CUSTOM*	C	CASAMBI*	C
		60°	60					ON BOARD*	OB

### ACCESSORIES FOR USE WITH 10° ONLY

ACCESSORY	CODE
26° FILTER	EL6-26F
38° FILTER	EL6-38F
45° X 45° SQUARE FILTER	EL6-SQF
10° X 60° HORIZONTAL LINE FILTER	EL6-HLF
WALLWASH	EL6-WWF

\* TRACK ADAPTOR COLOUR NOT CUSTOMIZABLE, ONLY AVAILABLE IN BLACK, WHITE & GREY  
 \* DALI DRIVER IS BUILT INTO TRACK ADAPTER, 6-WIRE TRACK ONLY  
 \* CASAMBI DRIVER IS BUILT INTO TRACK ADAPTER, 4-WIRE TRACK ONLY