
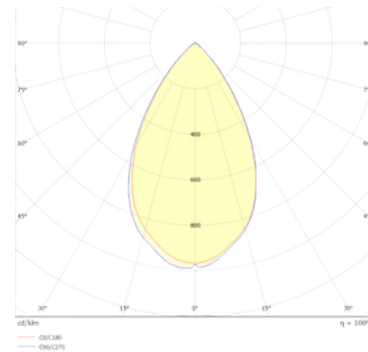


Recessed waterproof and 90 minute fire rated low glare LED downlight.

With a high CRI LED in numerous colour temperatures and finishes. Die cast aluminium body with a high efficiency PMMA lens with an IP65 rating.

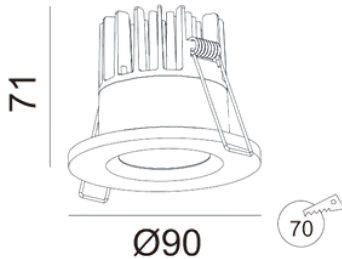

### MECHANICAL

Installation	Recessed
Housing Material	Aluminium
Lens Material	PMMA Optic
Ingress Protection	IP65
Luminaire Diameter	90mm
Cut-Out Diameter	70mm
Luminaire Depth	71mm
Fire Rated	90min

### ELECTRICAL

Driver Included	Yes
Voltage Input	230V AC
Drive Current	350mA

### LIGHT SOURCE

LED Manufacturer	Cree
LED Series	CXA1512
Beam Angle	60°
Luminaire Lumens	871lm
Luminaire Efficacy	72.58lm/W
Luminaire Power	12W
Colour Rendition (CRI)	Ra 92
Colour Consistency	SDCM 3
Lifetime	L90 B10 60,000hrs



### LUMINAIRE OPTIONS

CCT	CODE	COLOUR	CODE	DIMMING	CODE
2700K	W27	WHITE	W	TRAILING EDGE	T
3000K	W30	BLACK	B	1-10V	A
4000K	W40	CUSTOM	C	DALI	D
				CASAMBI	C

### CODE GENERATION

	LUMINAIRE	CCT	COLOUR	DIMMING
CODE	JH-1011	W30	W	T
REQUIREMENTS	JONAH	3000K	WHITE	TRAILING EDGE

**COMPLETE CODE = JH-1011-W30-W-T**