

KIOS 2 (KI-60751)



Product description

With recessing box / driver - Embross frame - Adjustable: Tilt 5° or 10° (2 step)



Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- 5.5 mm thick front ring in grade 316 stainless steel
- Single cable entry, through wiring upon request
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear
- Recessing box in high-density polyethylene is included
- Suitable for drive-over with a maximum load of 2000 kg
- Vehicles with pneumatic tires can drive over the luminaire but the speed must not exceed 50 km/h
- Load is transferred by the housing to the foundation
- The distance between the luminaire and the illuminated surface should be at least 0.5 m

Optic



Product colour





KIOS 2 (KI-60751)

Technical information

Material	Stainless Steel	Input voltage	220-240 V 50/60 Hz	Dimming type	On/Off, 1-10V, DALI
Light source	7 LED	Optic	N, M, W	Product colours	Stainless Steel
Power	12 W	Optic value	18°, 28°, 38°	Weight	5.7 kg
Lumen	956 - 1086 lm	CCT / CRI	3000K CRI80, 4000K CRI80	Operating temperature	-20 °C to 40 °C
Efficacy	80 - 91 lm/W	Bug	B0-U4-G0, B0-U5-G0	Through wiring	Single cable entry, through wiring upon request
Driver option	Integral control gear	ULR	100%	Lens / Reflector / Optic	Clear toughened glass, High-efficiency PMMA lens
Driver	Constant current (CC)	ULOR	100%	Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

KI-60751

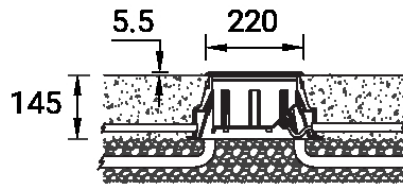


Accessories



Anti slip glass
A61512



Connector IP68 3 Pin Power
A62591



Honeycomb louvre
A62021



DALI Control System
Control-DALI

KIOS 2 (KI-60751)

Connector IP68 5 Pin Power +
Signal

A613191

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.