



Latte LED



Classic luminaire with diffuser based on high quality LED light sources for general lighting.

Materials: Powder painted, steel sheet base in white color, end caps made of PC, semi-transparent grooven inside diffuser made of impact-resistant PMMA.

Installation: Ceiling mounted, suspended

Accessories: suspension (simple 1 pcs., electric 1 pcs.)

Power: 230 V

ELECTRICAL DATA

Light source	LED
Type of equipment	AC
Voltage rating	220 ... 240 V
Light source included	Yes
Power factor	0.96

MECHANICAL DATA

Type of installation	Universal
Housing material	Steel sheet / plastic

CERTIFICATES

Impact resistance	IK08
Class of protection	I
Light source protection	Yes
CE	Yes
PZH	Yes
HACCP+	Yes
EAC	Yes
Power Flicker	=< 3%

LIGHT DATA

Luminaire's luminous efficiency	91 %
Light colour	White
Color rendering index	84
Light distribution	Mid beam
Light distribution	DI
Light output degradation	B10
Lumen maintenance	L80
Lifetime	> 72000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	85 %

OPTICAL DATA



Louver/ shutter	OPAL
Diffuser material	Structural plastic

AVAILABE VARIANTS

Product code	Luminaire power [W]	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature	Degree of protection (IP)	Weight [kg]
DX007.1111.830.A000 PX4090643	13	1820	140	3000K	IP44	1.50

AVAILABLE VARIANTS

Product code	Luminaire power [W]	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature	Degree of protection (IP)	Weight [kg]
DX007.1111.840.A000 PX4090650	13	1870	144	4000K	IP44	1.50
DX008.1111.830.A000 PX4090657	26	3640	140	3000K	IP44	2.50
DX008.1111.840.A000 PX4090664	26	3750	144	4000K	IP44	2.50
DX009.1111.830.A000 PX4090671	39	5450	140	3000K	IP44	3.30
DX009.1111.840.A000 PX4090678	39	5620	144	4000K	IP44	3.30
DX004.1111.830.A000 PX4090680	13	1820	140	3000K	IP40	1.30
DX004.1111.840.A000 PX4090682	13	1870	144	4000K	IP40	1.30
DX005.1111.830.A000 PX4090684	26	3640	140	3000K	IP40	2.10
DX005.1111.840.A000 PX4090686	26	3750	144	4000K	IP40	2.10
DX006.1111.830.A000 PX4090688	39	5450	140	3000K	IP40	2.60
DX006.1111.840.A000 PX4090690	39	5620	144	4000K	IP40	2.60

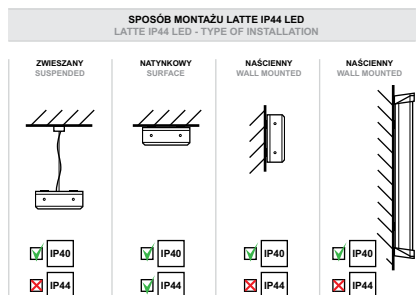

DIMENSIONS

L [mm]	W [mm]	H [mm]	OPAL
565	161	60	DX007.1111.830.A000 PX4090643
			DX007.1111.840.A000 PX4090650
1060	161	60	DX004.1111.830.A000 PX4090680
			DX004.1111.840.A000 PX4090682
1555	161	60	DX008.1111.830.A000 PX4090657
			DX008.1111.840.A000 PX4090664
			DX005.1111.830.A000 PX4090684
			DX005.1111.840.A000 PX4090686
			DX009.1111.830.A000 PX4090671
			DX009.1111.840.A000 PX4090678
			DX006.1111.830.A000 PX4090688
			DX006.1111.840.A000 PX4090690

L = Length | W = Width | H = Height / Depth

ACCESSORIES

Electric element



Electrical suspension
Pieces in set: 1

FS002.22.1500
PX0922077

Grey

FS002.11.1500
PX0922083

White

FS002.33.1500
PX0922090

Black

Installation element



Simple suspension
Pieces in set: 1

FS001.00.1500
PX0922149

