



Latte IP54 LED

Luminaire of increased degree of protection and simple, classic form.



BASIC INFORMATION

Materials: base made of plastic in white colour. OPAL UV-proof diffuser. IP54 seal.

Installation: Surface mounted

Power: 220 ... 240

CATEGORIZATION:

Type of luminaire: Clean room

Application: Social room, Corridor and staircase, Bathroom, Reception, Cloak room, Technical room, Security

Mounting type: Ceiling mounted, Wall mounted

Technical data

MECHANICAL DATA

Type of installation	Ceiling mounted
Housing material	Plastic
Designed for light-line	yes

OPTICAL DATA

Louver/ diffuser	OPAL
Diffuser colour	White
Diffuser material	Opal/mat plastic
UGR	17, 18

ELECTRICAL DATA

Light source	LED
Luminaire power	19 - 46 W
Number of light sources	1
Type of equipment	AC
Voltage rating	220 ... 240 V
Light source included	yes
Type of driver	DALI, ON/OFF
Emergency module	option
Motion sensor	option

LIGHT DATA

Luminaire luminous flux	1590 - 5800 lm
Luminaire's luminous efficacy	84 - 126 lm/W
Light colour	White
Color rendering index	80, 90
Light distribution	Wide beam
Light distribution	DI
Class of luminaire	I
MacAdam	SDCM 3
Lifetime L80B10 @25°C	100.000 h
Lifetime L90B10 @25°C	64.000 h
Lamp Lumen Maintenance Factor (after 60 000h)	85 %
Colour temperature	3000K, 4000K
CRI & colour temperature	830, 840, 930, 940

INFORMATION DATA

Net weight	1.7 - 3.3 kg
Colour	White
Operating temperature range	-20 ... 35
Power and luminous flux tolerance	+/-10%
Info	330x330

CERTIFICATES

Degree of protection (IP)	IP54
Impact resistance	IK07
Class of protection	I
Light source protection	yes
PZH	yes
CE	yes
HACCP+	yes

Dimensions

L 330 mm, 1160 mm mm


W 110 mm, 160 mm, 330 mm mm

H 85 mm, 90 mm mm

L - Length

W - Width

H - Height / Depth

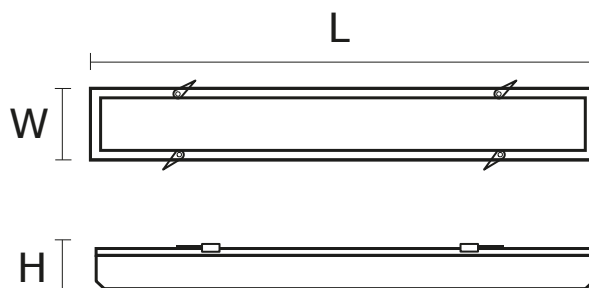

Accessories

ELECTRIC ELEMENTS



FS002.11.1500, FS002.11.3000,
FS002.11.4000, FS002.11.5000,
FS002.11.7000, FS002.33.1500,
FS002.33.3000, FS002.33.4000,
FS002.33.5000, FS002.33.7000,
FS002.22.1500, FS002.22.3000,
FS002.22.4000, FS002.22.5000,
FS002.22.7000

Electric suspension kit

INSTALLATION ELEMENTS



FS001.00.1500, FS001.00.3000,
FS001.00.4000, FS001.00.5000,
FS001.00.7000

Suspension kit 1x

