

**LEEDS 3 (LEE-30041)**



**Product description**

Down (Optic) & Up (Optic 2nd) - Rectangular




**Luminaire Structure**

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)


- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear

- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible


**Optic**

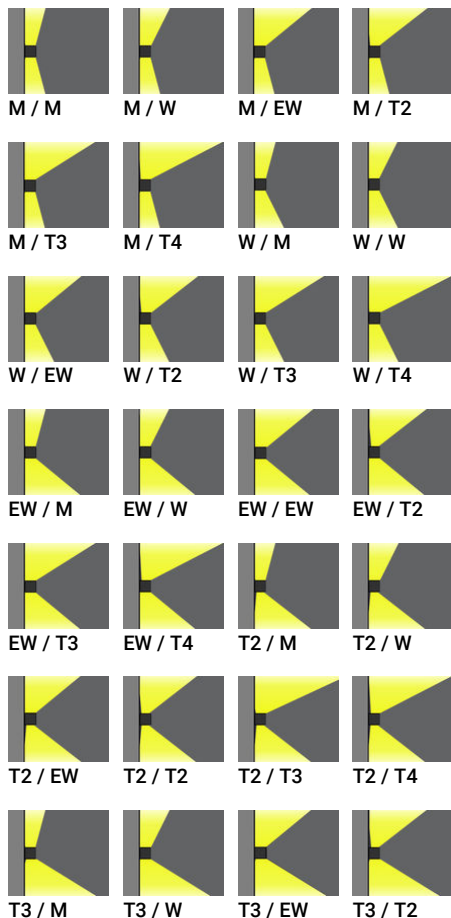

**Product colour**

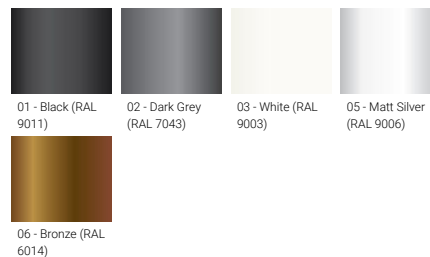

**Special finishes upon request**

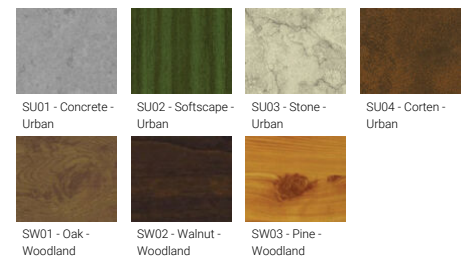

**LEEDS 3 (LEE-30041)**



T3 / T3    T3 / T4    T4 / M    T4 / W



T4 / EW    T4 / T2    T4 / T3    T4 / T4



ME / M    ME / W    ME / EW    ME / T2



ME / T3    ME / T4


**LEEDS 3 (LEE-30041)**

**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	8 & 8 LED
<b>Power</b>	28 W
<b>Lumen</b>	2752 - 3350 lm
<b>Efficacy</b>	99 - 121 lm/W
<b>Driver option</b>	Integral control gear
<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240 V 50/60 Hz
<b>Optic</b>	M, W, EW, T2, T3, T4, ME
<b>Optic value</b>	30°, 56°, 99°x102°, 129°x49°, 112°x80°, 89°x60°, 122°x50°

<b>Optic (2nd)</b>	M, W, EW, T2, T3, T4
<b>Optic (2nd) value</b>	30°, 56°, 99°x102°, 129°x49°, 112°x80°, 89°x60°
<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>Bug</b>	B0-U5-G0, B1-U5-G0, B2-U5-G0
<b>ULR</b>	47%, 48%, 49%, 50%, 51%, 52%, 53%
<b>ULOR</b>	47%, 48%, 49%, 50%, 51%, 52%, 53%
<b>CIE flux code n°3</b>	100, 97, 98, 99
<b>Dimming type</b>	On/Off, 1-10V
<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	1.8 kg

<b>Operating temperature</b>	-20 °C to 40 °C
<b>Through wiring</b>	Single cable entry
<b>Lens / Reflector / Optic</b>	Clear toughened glass, High-efficiency PMMA lens
<b>MacAdam Ellipse</b>	3 SDCM
<b>Lifetime L90B10 (hours)</b>	> 90,000
<b>Lifetime L80B10 (hours)</b>	> 90,000
<b>Lifetime L80B50 (hours)</b>	> 90,000
<b>Variants (On/Off, 1-10V)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

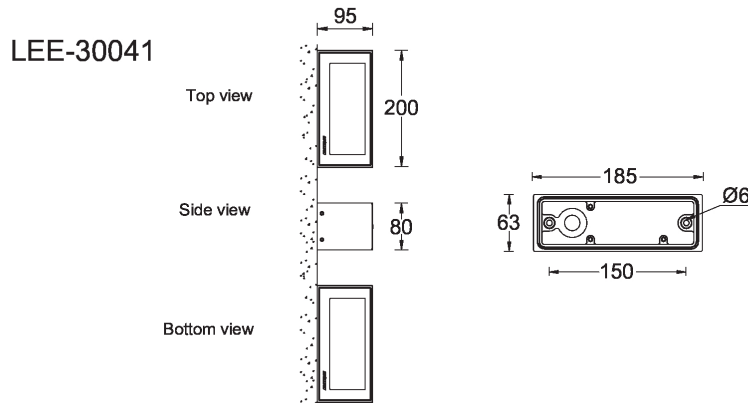

**Accessories**



Surface mounting box for easy cabling (LEEDS 3)  
**SCE-LEEDS-3**