


LEEDS 5 (LEE-30051)



Product description

Down (Optic) & Up (Optic 2nd) - Rectangular

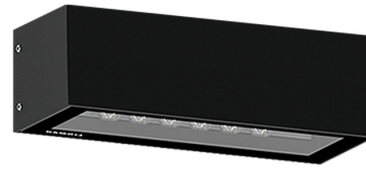


Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)


- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear

- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible


Optic

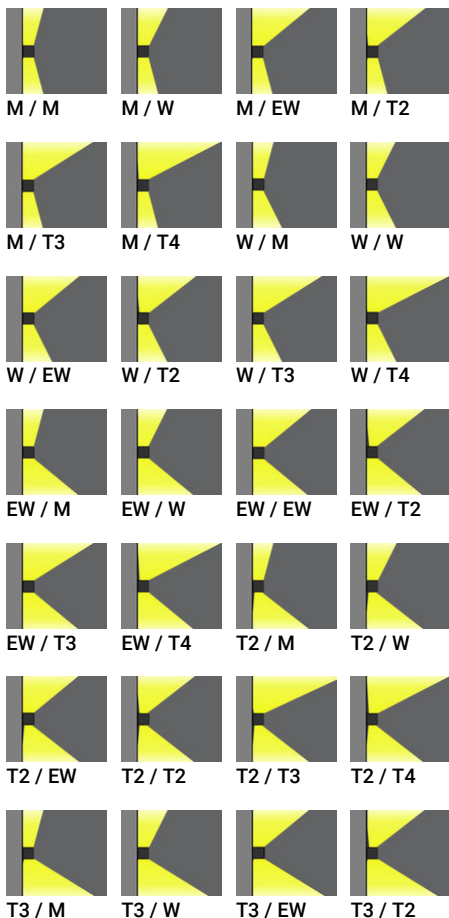

Product colour

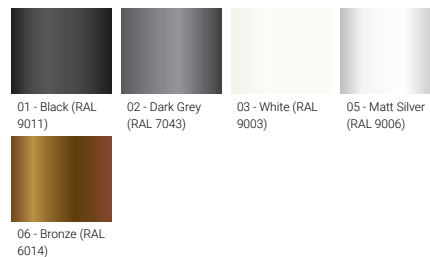

Special finishes upon request

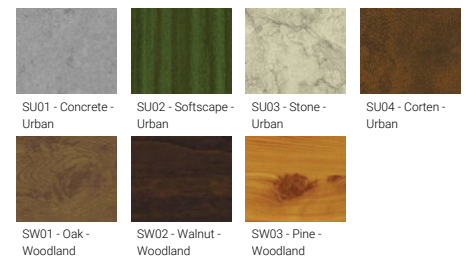

LEEDS 5 (LEE-30051)



T3 / T3 T3 / T4 T4 / M T4 / W



T4 / EW T4 / T2 T4 / T3 T4 / T4



ME / M ME / W ME / EW ME / T2



ME / T3 ME / T4

LEEDS 5 (LEE-30051)


Technical information

Material	Aluminium
Light source	12 & 12 LED
Power	39 W
Lumen	4090 - 4844 lm
Efficacy	104 - 123 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	M, W, EW, T2, T3, T4, ME
Optic value	30°, 56°, 109°x102°, 137°x58°, 124°x86°, 108°x66°, 140°x62°

Optic (2nd)	M, W, EW, T2, T3, T4
Optic (2nd) value	30°, 56°, 109°x102°, 137°x58°, 124°x86°, 108°x66°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B1-U5-G0, B1-U5-G1, B2-U5-G0
ULR	47%, 48%, 49%, 50%, 51%, 52%, 53%
ULOR	47%, 48%, 49%, 50%, 51%, 52%, 53%
CIE flux code n°3	100, 97, 98, 99
Dimming type	On/Off
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	2.0 kg

Operating temperature	-20 °C to 40 °C
Through wiring	Single cable entry, through wiring upon request
Lens / Reflector / Optic	Clear toughened glass, High-efficiency PMMA lens
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 90,000
Lifetime L80B10 (hours)	> 90,000
Lifetime L80B50 (hours)	> 90,000
Variants (On/Off)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

LEE-30051

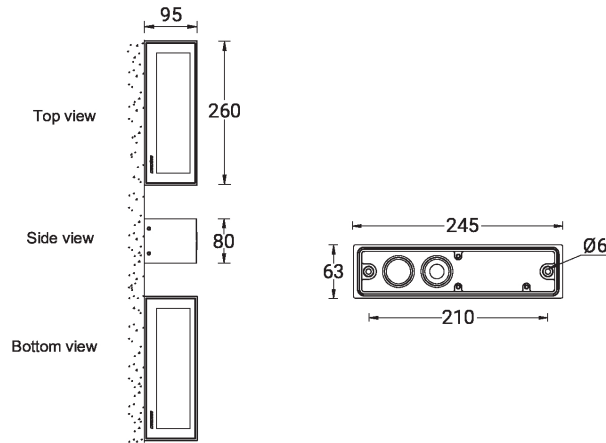

Accessories



Surface mounting box for easy cabling (LEEDS 5)
SCE-LEEDS-5