

LIGHTTALK 1 (LA-60004) (Version 2)**Product description**

With recessing box - Integral control gear - 1250 mm - Class I

**Luminaire Structure**

- Die-cast aluminium end-caps
- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel frame on request
- Single cable entry, through wiring upon request
- One IP67 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Recessing box is included
- Suitable for walk-over with a maximum load of 500 kg
- 24 VDC input, DMX/RDM address with stable signal

Optic

AS

Product colour


00 - Stainless Steel

LIGHTALK 1 (LA-60004) (Version 2)

Technical information

Material	Stainless Steel	Optic	AS	Weight	7.8 kg
Light source	36 LED	Optic value	27°x60°	Operating temperature	-20 °C to 40 °C
Power	56 W	CCT / CRI	3000K CRI80, 4000K CRI80	Cable	One IP67 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Lumen	3573 - 3760 lm	Bug	B0-U5-G0	Through wiring	Single cable entry, through wiring upon request
Efficacy	64 - 67 lm/W	ULR	99%	Lens / Reflector / Optic	Clear toughened glass
Driver option	Integral control gear	ULOR	99% 99%, 99%	Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Driver	Constant current (CC)	Dimming type	On/Off, 1-10V, DALI		
Input voltage	220-240 V 50/60 Hz	Product colours	Stainless Steel		

LA-60004

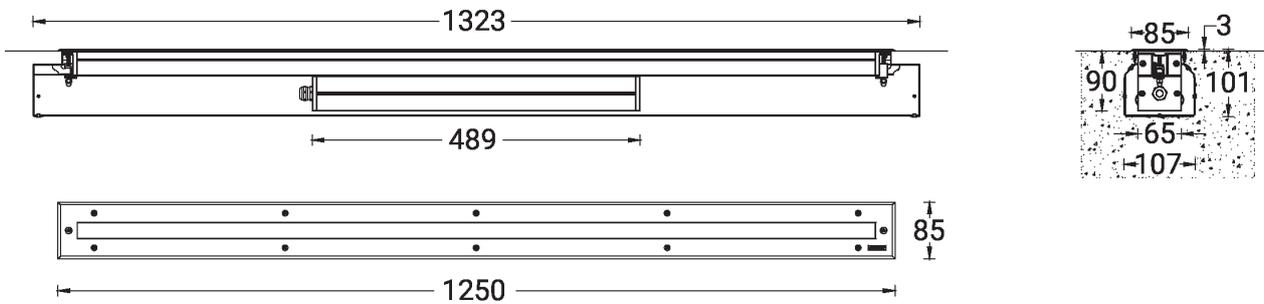

Accessories

