

LIGHTALK 1 (LA-60002)



Product description


With recessing box - Integral control gear - 1250 mm - Class I



Luminaire Structure

- | | | |
|--|--|---|
| <ul style="list-style-type: none"> - Die-cast aluminium end-caps - Extruded aluminium housing - Pre-treated before powder coating ensuring high corrosion resistance - Stainless steel frame on request - Single cable entry, through wiring upon request | <ul style="list-style-type: none"> - One IP67 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable - Stainless steel fasteners in grade 304 with zinc flake coating (ZFC) - Durable silicone rubber gasket - Clear toughened glass - Integral control gear | <ul style="list-style-type: none"> - Recessing box is included - Suitable for walk-over with a maximum load of 500 kg - 24 VDC input, DMX/RDM address with stable signal |
|--|--|---|

Optic

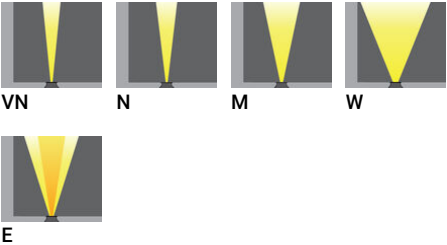

Product colour




LIGHTALK 1 (LA-60002)

Technical information

| | | | | | |
|----------------------|-----------------------|------------------------------|------------------------------|---------------------------------------|---|
| Material | Stainless Steel | Optic value | 12°, 14°, 24°, 42°, 18° x35° | Cable | One IP67 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable |
| Light source | 36 LED | CCT / CRI | 3000K CRI80, 4000K CRI80 | Through wiring | Single cable entry, through wiring upon request |
| Power | 56 W | Bug | B0-U5-G0 | Lens / Reflector / Optic | Clear toughened glass |
| Lumen | 3908 - 5703 lm | ULR | 100% | MacAdam Ellipse | 3 SDCM |
| Efficacy | 70 - 102 lm/W | ULOR | 100% | Lifetime L90B10 (hours) | > 120,000 |
| Driver option | Integral control gear | Dimming type | On/Off, 1-10V, DALI | Lifetime L80B10 (hours) | > 120,000 |
| Driver | Constant current (CC) | Product colours | Stainless Steel | Lifetime L80B50 (hours) | > 120,000 |
| Input voltage | 220-240 V 50/60 Hz | Weight | 7.8 kg | Variants (On/Off, 1-10V, DALI) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |
| Optic | VN, N, M, W, E | Operating temperature | -20 °C to 40 °C | | |

LA-60002

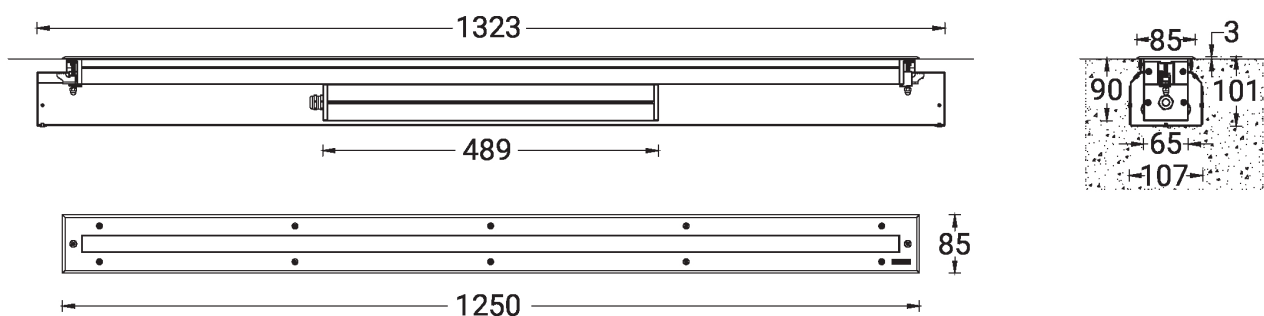

Accessories



Connector IP68 3 Pin Power
A62591



DALI Control System
Control-DALI



Connector IP68 5 Pin Power +
Signal
A613191