

LIGHTTALK 1 (LA-60001)



Product description


With recessing box - Integral control gear - 655 mm - Class I



Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel frame on request
- Single cable entry, through wiring upon request
- One IP67 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Recessing box is included
- Suitable for walk-over with a maximum load of 500 kg
- 24 VDC input, DMX/RDM address with stable signal

Optic

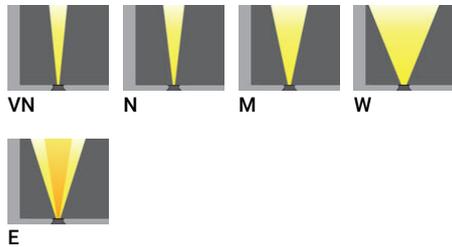

Product colour




LIGHTALK 1 (LA-60001)

Technical information

| | | | | | |
|----------------------|-----------------------|------------------------------|------------------------------|---------------------------------------|---|
| Material | Stainless Steel | Optic value | 12°, 14°, 24°, 44°, 18° x35° | Cable | One IP67 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable |
| Light source | 18 LED | CCT / CRI | 3000K CRI80, 4000K CRI80 | Through wiring | Single cable entry, through wiring upon request |
| Power | 28 W | Bug | B0-U5-G0 | Lens / Reflector / Optic | Clear toughened glass |
| Lumen | 1943 - 2847 lm | ULR | 100% | MacAdam Ellipse | 3 SDCM |
| Efficacy | 69 - 102 lm/W | ULOR | 100% | Lifetime L90B10 (hours) | > 120,000 |
| Driver option | Integral control gear | Dimming type | On/Off, 1-10V, DALI | Lifetime L80B10 (hours) | > 120,000 |
| Driver | Constant current (CC) | Product colours | Stainless Steel | Lifetime L80B50 (hours) | > 120,000 |
| Input voltage | 220-240 V 50/60 Hz | Weight | 4.6 kg | Variants (On/Off, 1-10V, DALI) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |
| Optic | VN, N, M, W, E | Operating temperature | -20 °C to 40 °C | | |

LA-60001

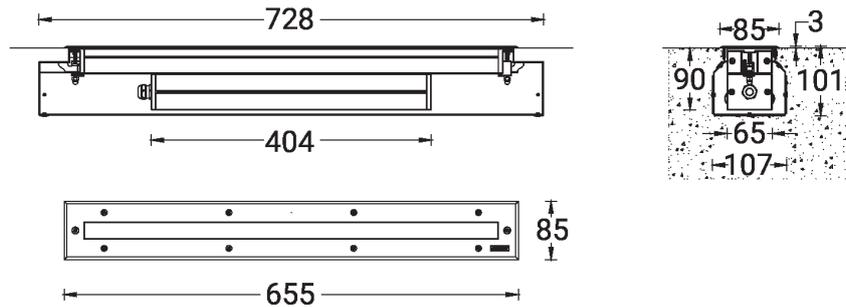

Accessories

