

ODESSA 2 (OD-50011) (Version 2)



Product description

Medium




Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable


- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass

- Integral control gear
- Arm mounting installation


Optic

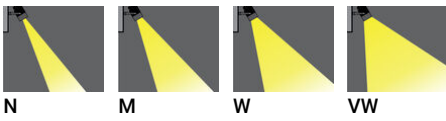

Product colour

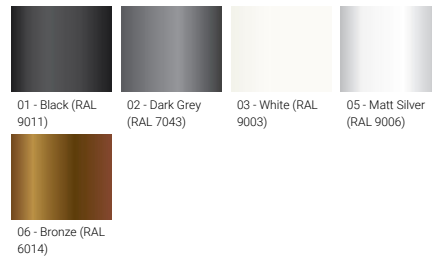

Special finishes upon request

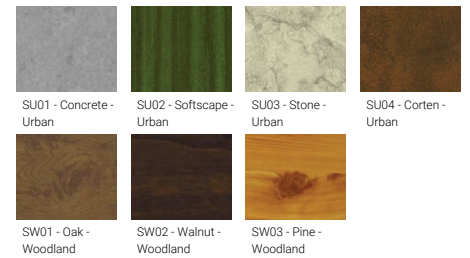

ODESSA 2 (OD-50011) (Version 2)


Technical information

Material	Aluminium
Light source	1 COB
Power	35 W
Lumen	2962 - 3545 lm
Efficacy	85 - 101 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	N, M, W, VW

Optic value	15°, 24°, 47°, 66°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B2-U0-G0, B3-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100, 99
Dimming type	On/Off, DALI
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	2.3 kg

Operating temperature	-20 °C to 35 °C
EPA (m2)	0.048
Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	High-efficiency optical reflector, Clear toughened glass
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 55,000
Variants (DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

OD-50011

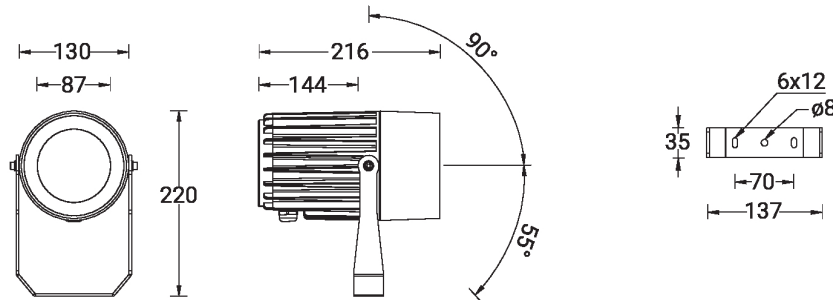

Accessories



Anti-glare louvre
A80231



Anti-glare visor
A80131



Ground spike
A50441



Linear spread lens
A80114

ODESSA 2 (OD-50011) (Version 2)

DALI Control System
Control-DALI



Pole clamp for ODESSA 1, 2
A22581

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.