

**QUARTER 1 (QU-31344)**



**Product description**


Small




**Luminaire Structure**

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear


**Optic**

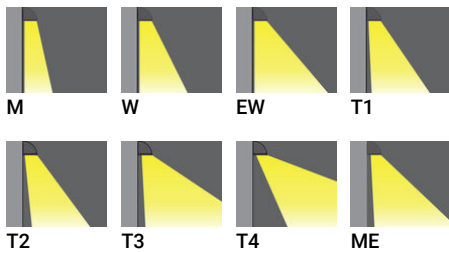

**Product colour**

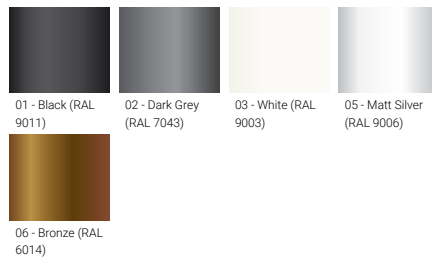

**Special finishes upon request**

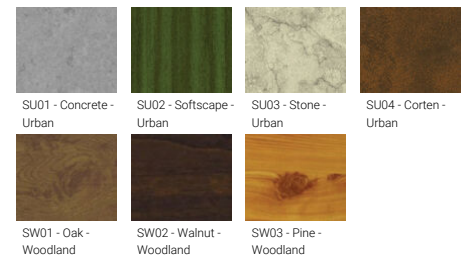

**QUARTER 1 (QU-31344)**


**Technical information**

|                      |                              |
|----------------------|------------------------------|
| <b>Material</b>      | Aluminium                    |
| <b>Light source</b>  | 24 LED                       |
| <b>Power</b>         | 37 W                         |
| <b>Lumen</b>         | 4454 - 5121 lm               |
| <b>Efficacy</b>      | 120 - 138 lm/W               |
| <b>Driver option</b> | Integral control gear        |
| <b>Driver</b>        | Constant current (CC)        |
| <b>Input voltage</b> | 220-240 V 50/60 Hz           |
| <b>Optic</b>         | M, W, EW, T1, T2, T3, T4, ME |

|                          |  |
|--------------------------|--|
| <b>Optic value</b>       | 30°, 56°, 112°, 145°x75°, 137°x58°, 123°x92°, 105°x69°, 140°x63°   |
| <b>CCT / CRI</b>         | 3000K CRI80, 4000K CRI80   |
| <b>Bug</b>               | B1-U0-G1, B2-U0-G0, B2-U0-G2, B3-U0-G0, B3-U0-G1   |
| <b>ULR</b>               | 0%   |
| <b>ULOR</b>              | 0%   |
| <b>CIE flux code n°3</b> | 96, 97, 98, 99   |
| <b>Dimming type</b>      | On/Off, 1-10V, DALI  |
| <b>Product colours</b>   | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| <b>Weight</b>            | 6.0 kg   |

|                                 |   |
|---------------------------------|---|
| <b>Operating temperature</b>    | -20 °C to 40 °C   |
| <b>Through wiring</b>           | Two cable entries for through wiring  |
| <b>Lens / Reflector / Optic</b> | Clear toughened glass   |
| <b>MacAdam Ellipse</b>          | 3 SDCM  |
| <b>Lifetime L90B10 (hours)</b>  | > 90,000  |
| <b>Lifetime L80B10 (hours)</b>  | > 90,000  |
| <b>Lifetime L80B50 (hours)</b>  | > 90,000  |
| <b>Variants (1-10V, DALI)</b>   | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

QU-31344

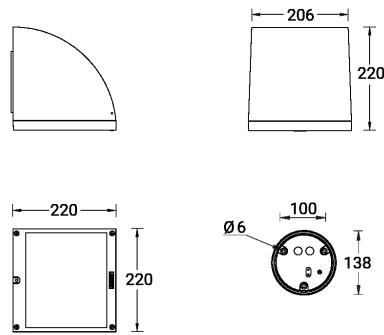

**Accessories**



DALI Control System  
Control-DALI