
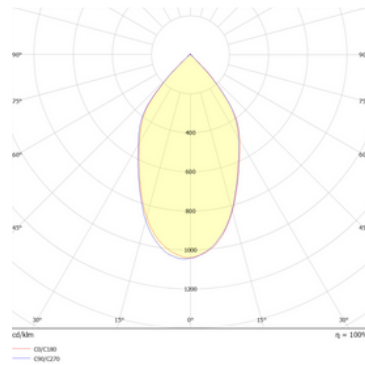


A modern, high-performing downlight suitable for commercial and residential applications. Die cast aluminium body with a high efficiency reflector and clear polycarbonate lens. High quality LED technology ensures the luminaire's long life while maintaining colour quality.

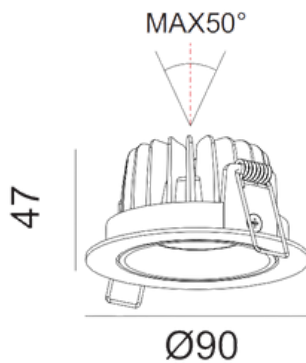

MECHANICAL

Installation	Recessed
Housing Material	Aluminium
Lens Material	Clear Polycarbonate
Ingress Protection	IP20
Luminaire Diameter	90mm
Cut-Out Diameter	83mm
Luminaire Depth	50mm
Adjustable	Max. Tilt $\pm 25^\circ$

ELECTRICAL

Driver Included	Yes
Voltage Input	230V AC
Drive Current	220mA

LIGHT SOURCE

LED Manufacturer	Cree
LED Series	CXA1507
Beam Angle	60°
Luminaire Lumens	800lm
Luminaire Efficacy	80lm/W
Luminaire Power	10W
Colour Rendition (CRI)	Ra 92
Colour Consistency	SDCM 3
Lifetime	L90 B10 60,000hrs



LUMINAIRE OPTIONS

CCT	CODE	COLOUR	CODE	DIMMING	CODE
2700K	W27	WHITE	W	TRAILING EDGE	T
3000K	W30	BLACK	B	1-10V	A
4000K	W40	CUSTOM	C	DALI	D
				CASAMBI	C

CODE GENERATION

	LUMINAIRE	CCT	COLOUR	DIMMING
CODE	HR-1028	W30	W	T
REQUIREMENTS	HUNTER	3000K	WHITE	TRAILING EDGE

COMPLETE CODE = HR-1028-W30-W-T