

A modern, high-performing surface mounted spot light suitable for commercial, retail and residential applications. Extruded aluminium body with a high efficiency clear polycarbonate lens. High quality LED technology ensures the luminaire's long life while maintaining colour quality.



MECHANICAL

Installation	Surface
Housing Material	Aluminium
Lens Material	PMMA Lens
Ingress Protection	IP20
Luminaire Rotate	355°
Luminaire Tilt	95°

ELECTRICAL

Driver Included	Yes
Voltage Input	230V AC

LIGHT SOURCE

LED Manufacturer	Cree
Beam Angle	15°- 45°
Luminaire Power	10-15W
Colour Rendition (CRI)	Ra 90
Colour Consistency	SDCM 3
Lifetime	L90 B10 60,000hrs



CODE GENERATION

	LUMINAIRE	POWER	OPTIC	CCT	COLOUR	DIMMING
CODE	LA-SM	20	ZM	W30	B	T
REQUIREMENTS	LUKA	20W	25°-60°	3000K	BLACK	TRAILING EDGE

COMPLETE CODE = LA-SM-20-ZM-W30-B-T



OPTIONAL ONBOARD DIMMER



LUMINAIRE OPTIONS

POWER	CODE	OPTIC	CODE	CCT	CODE	COLOUR	CODE	DIMMING	CODE
10W	10	25°- 60°	ZM	2700K	W27	WHITE	W	TRAILING EDGE	T
15W	15			3000K	W30	BLACK	B	DALI*	D
				4000K	W40	CUSTOM*	C	CASAMBI*	C
				CCT SELECT*	CS			ONBOARD KNOB	OBD
				TUNEABLE WHITE*	TW			ONBOARD DIGITAL DISPLAY	ODD

ACCESSORIES

ACCESSORY	CODE
HONEY COMB	LAF-60ZM-01




* DALI & CASAMBI VERSIONS, REMOTE DRIVER
 * CCT SELECT & TUNEABLE WHITE AVAILABLE WITH ONBOARD DIMMER KNOB
 * ONBOARD DIGITAL DISPLAY AVAILABLE ON TUNEABLE WHITE ONLY

10W FIXED OPTIC		
15°	3000K	580lm
15°	4000K	623lm
45°	3000K	776lm
45°	4000K	834lm

15W FIXED OPTIC		
15°	3000K	784lm
15°	4000K	842lm
45°	3000K	1042lm
45°	4000K	1100lm

CCT SELECT & TUNEABLE WHITE CONTROL

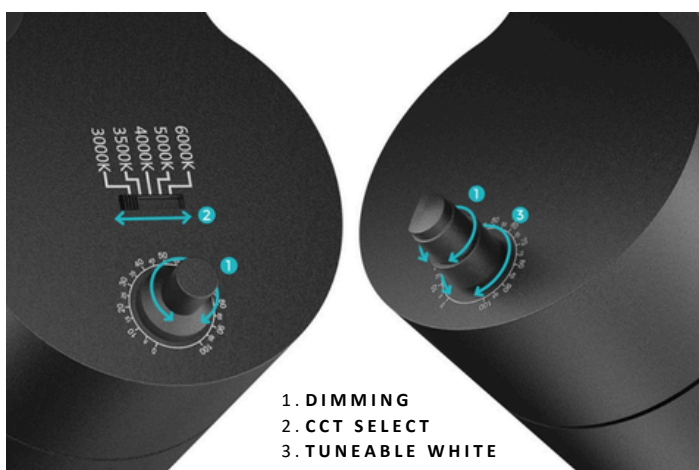

DIGITAL DISPLAY

