

A modern, high-performing surface mounted spot light suitable for commercial, retail and residential applications.

Extruded aluminium body with a high efficiency clear polycarbonate lens. High quality LED technology ensures the luminaire's long life while maintaining colour quality.



MECHANICAL

Installation	Surface
Housing Material	Aluminium
Lens Material	PMMA Lens
Ingress Protection	IP20
Luminaire Rotate	355°
Luminaire Tilt	95°

ELECTRICAL

Driver Included	Yes
Voltage Input	230V AC

LIGHT SOURCE

LED Manufacturer	Bridgelux
Beam Angle	6°, 12°, 24°, 36°, 60°
Luminaire Power	10-15W
Colour Rendition (CRI)	Ra 90
Colour Consistency	SDCM 3
Lifetime	L90 B10 60,000hrs



CODE GENERATION

	LUMINAIRE	POWER	OPTIC	CCT	COLOUR	DIMMING
CODE	LA-SM	15	60	W30	B	T
REQUIREMENTS	LUKA	15W	60°	3000K	BLACK	TRAILING EDGE

COMPLETE CODE = LA-SM-15-60-W30-B-T

OPTIONAL ONBOARD DIMMER



LUMINAIRE OPTIONS

POWER	CODE	OPTIC	CODE	CCT	CODE	COLOUR	CODE	DIMMING	CODE
10W	10	6°	6	2700K	W27	WHITE	W	TRAILING EDGE	T
15W	15	12°	12	3000K	W30	BLACK	B	DALI*	D
		24°	24	4000K	W40	CUSTOM*	C	CASAMBI*	C
		36°	36	CCT Select*	CS			ONBOARD	OBD
		60°	60	Tuneable White*	TW			ONBOARD DIGITAL DISPLAY	ODD

ACCESSORIES

ACCESSORY	CODE
HONEY COMB	LAF-60-01
CROSS LOUVRE	LAF-60-02
SNOOT	LAF-60-03
EYE SNOOT	LAF-60-04
WALL WASH RING	LAF-60-05
BARN DOOR	LAF-60-06

* CASAMBI & DALI VERSIONS, REMOTE DRIVER
 * CCT SELECT & TUNEABLE WHITE AVAILABLE WITH ONBOARD DIMMER K80B
 * ONBOARD DIGITAL DISPLAY AVAILABLE ON TUNEABLE WHITE ONLY

SNOOT ACCESSORIES

*NOT SUITABLE FOR 6° VERSION



LAF-60-01



LAF-60-02



LAF-60-03



LAF-60-04




LAF-60-05



LAF-60-06

FILTER LENSES - 6° BEAM ANGLE ONLY



CIRCULAR SMALL
LAF-6-CS




SQUARE SMALL
LAF-6-SS



RECTANGULAR
LAF-6-R



MIDDLE LINE
LAF-6-ML



CIRCULAR BIG
LAF-6-CB



SQUARE BIG
LAF-6-SB



NARROW LINE
LAF-6-NL




WIDE LINE
LAF-6-WL

10W FIXED OPTIC		
6°	3000K	426lm
6°	4000K	455lm
12°	3000K	964lm
12°	4000K	1012lm
24°	3000K	962lm
24°	4000K	1010lm
36°	3000K	1063lm
36°	4000K	1116lm
60°	3000K	976lm
60°	4000K	1025lm

15W FIXED OPTIC		
12°	3000K	1519lm
12°	4000K	1595lm
24°	3000K	1426lm
24°	4000K	1497lm
36°	3000K	1377lm
36°	4000K	1445lm
60°	3000K	1375lm
60°	4000K	1443lm

CCT SELECT & TUNEABLE WHITE CONTROL

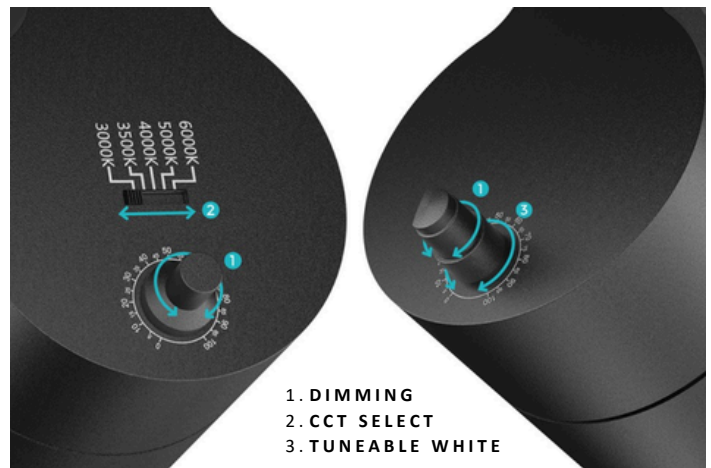

1. DIMMING
2. CCT SELECT
3. TUNEABLE WHITE

DIGITAL DISPLAY

