

A modern, high-performing surface mounted spot light suitable for commercial, retail and residential applications.

Extruded aluminium body with a high efficiency clear polycarbonate lens. High quality LED technology ensures the luminaire's long life while maintaining colour quality.



MECHANICAL

Installation	Surface
Housing Material	Aluminium
Lens Material	PMMA Lens
Ingress Protection	IP20
Luminaire Rotate	355°
Luminaire Tilt	95°

ELECTRICAL

Driver Included	Yes
Voltage Input	230V AC

LIGHT SOURCE

LED Manufacturer	Cree
Beam Angle	15°, 24°, 38° or 60°
Luminaire Power	20-30W
Colour Rendition (CRI)	Ra 90
Colour Consistency	SDCM 3
Lifetime	L90 B10 60,000hrs



CODE GENERATION

	LUMINAIRE	POWER	OPTIC	CCT	COLOUR	DIMMING
CODE	LA-SM	20	60	W30	B	T
REQUIREMENTS	LUKA	20W	60°	3000K	BLACK	TRAILING EDGE

COMPLETE CODE = LA-SM-20-60-W30-B-T

LUMINAIRE OPTIONS

POWER	CODE	OPTIC	CODE	CCT	CODE	COLOUR	CODE	DIMMING	CODE
20W	20	15°	15	2700K	W27	WHITE	W	TRAILING EDGE	T
25W	25	24°	24	3000K	W30	BLACK	B	DALI*	D
30W*	30	38°	38	4000K	W40	CUSTOM*	C	CASAMBI*	C
								ONBOARD KNOB	OBD
								ONBOARD DIGITAL DISPLAY	ODD
		60°	60	CCT SELECT*	CS				
				TUNEABLE WHITE*	TW				

OPTIONAL ONBOARD DIMMER



ACCESSORIES

ACCESSORY	CODE
HONEY COMB	LAF-84-01
CROSS LOUVRE	LAF-84-02
SNOOT	LAF-84-03
EYE SNOOT	LAF-84-04
WALL WASH RING	LAF-84-05
BARN DOOR	LAF-84-06

* CASAMBI & DALI VERSIONS, REMOTE DRIVE
 * CCT SELECT & TUNEABLE WHITE AVAILABLE WITH ONBOARD DIMMER KNOB
 * ONBOARD DIGITAL DISPLAY AVAILABLE ON TUNEABLE WHITE ONLY
 * 30W VERSION WITH CCT SELECT & TUNEABLE WHITE, REMOTE DRIVER



LAF-84-01



LAF-84-02



LAF-84-03



LAF-84-04



LAF-84-05



LAF-84-06

20W FIXED OPTIC

15°	3000K	2417lm
15°	4000K	2517lm
24°	3000K	2371lm
24°	4000K	2470lm
38°	3000K	2522lm
38°	4000K	2627lm
60°	3000K	2301lm
60°	4000K	2397lm


25W FIXED OPTIC

15°	3000K	2747lm
15°	4000K	2862lm
24°	3000K	2796lm
24°	4000K	2912lm
38°	3000K	2884lm
38°	4000K	3004lm
60°	3000K	2772lm
60°	4000K	2887lm

30W FIXED OPTIC

15°	3000K	3137lm
15°	4000K	3268lm
24°	3000K	3079lm
24°	4000K	3208lm
38°	3000K	3226lm
38°	4000K	3361lm
60°	3000K	3246lm
60°	4000K	3381lm

CCT SELECT & TUNEABLE WHITE CONTROL

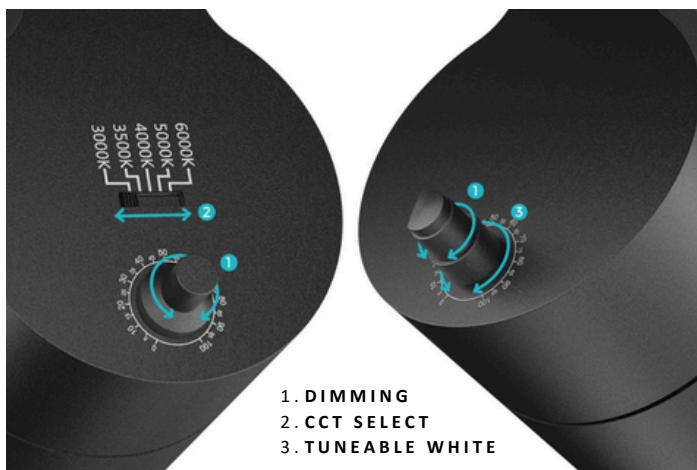

1. DIMMING
2. CCT SELECT
3. TUNEABLE WHITE

DIGITAL DISPLAY

