

ZAAB 1 (ZA-50001) (Version 2)



Product description

With mounting box




Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request


- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector

- Clear toughened glass
- Integral control gear


Optic

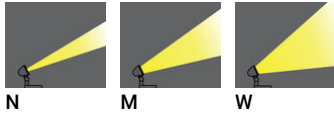

Product colour

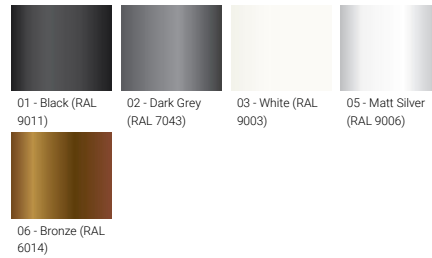

Special finishes upon request

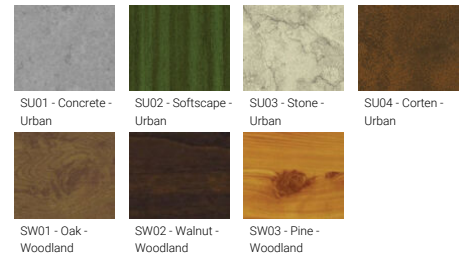


ZAAB 1 (ZA-50001) (Version 2)

Technical information

Material	Aluminium	Optic value	14°, 24°, 44°	Operating temperature	-20 °C to 40 °C
Light source	1 COB	CCT / CRI	3000K CRI80, 4000K CRI80	EPA (m2)	0.032
Power	20 W	Bug	B2-U0-G0	Through wiring	Single cable entry, through wiring upon request
Lumen	1875 - 2070 lm	ULR	0%	Lens / Reflector / Optic	High-efficiency optical reflector, Clear toughened glass
Efficacy	94 - 104 lm/W	ULOR	0%	MacAdam Ellipse	3 SDCM
Driver option	Integral control gear	CIE flux code n°3	100	Lifetime L90B10 (hours)	> 61,000
Driver	Constant current (CC)	Dimming type	On/Off, 1-10V, DALI	Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Input voltage	220-240 V 50/60 Hz	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland		
Optic	N, M, W	Weight	2.8 kg		

ZA-50001

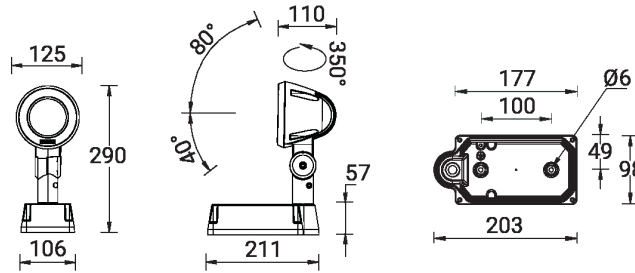

Accessories



Anti-glare visor
A52431



Anti-glare hood
A52531



Anti-glare louvre
A51621



Linear spread lens
A50914

ZAAB 1 (ZA-50001) (Version 2)

Snoot
A54131



DALI Control System
Control-DALI

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.