

ZAAB 2 (ZA-50011) (Version 2)**Product description**


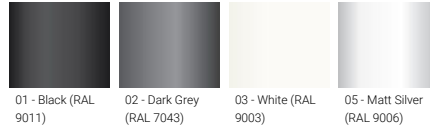
With mounting box

**Luminaire Structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request

- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector

- Clear toughened glass
- Integral control gear

Optic**N****M****W****VW****Product colour**

01 - Black (RAL 9011)

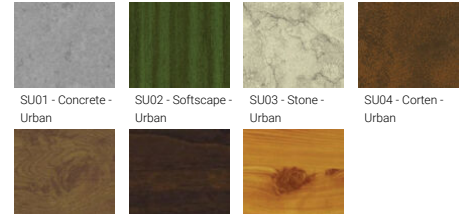
02 - Dark Grey (RAL 7043)

03 - White (RAL 9003)

05 - Matt Silver (RAL 9006)



06 - Bronze (RAL 6014)

Special finishes upon request

SU01 - Concrete - Urban

SU02 - Softscape - Urban

SU03 - Stone - Urban

SU04 - Corten - Urban

SW01 - Oak - Woodland

SW02 - Walnut - Woodland

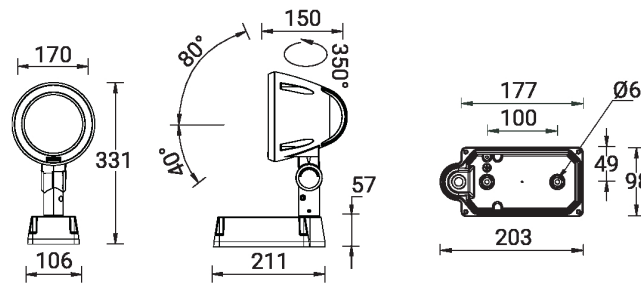
SW03 - Pine - Woodland

ZAAB 2 (ZA-50011) (Version 2)

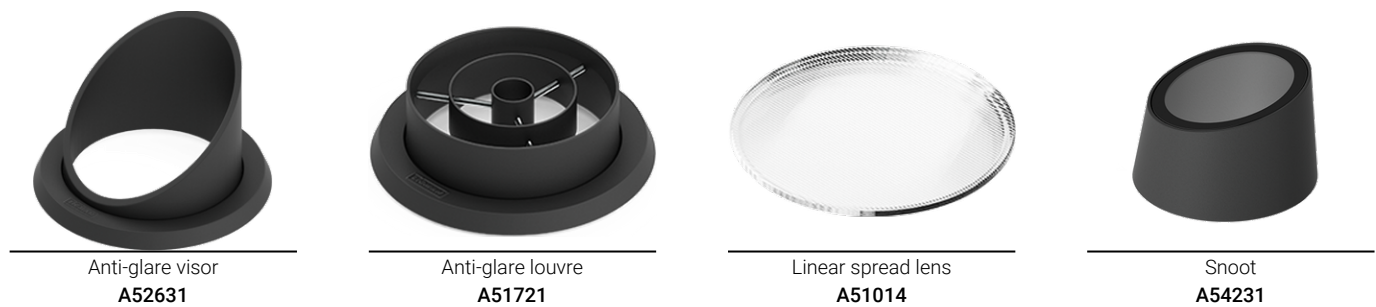
Technical information

Material	Aluminium	Optic value	16°, 26°, 41°, 65°	Operating temperature	-20 °C to 40 °C
Light source	1 COB	CCT / CRI	3000K CRI80, 4000K CRI80	EPA (m2)	0.044
Power	40 W	Bug	B3-U0-G0, B3-U0-G1	Through wiring	Single cable entry, through wiring upon request
Lumen	4194 - 5013 lm	ULR	0%		High-efficiency optical reflector, Clear toughened glass
Efficacy	105 - 125 lm/W	ULOR	0%	Lens / Reflector / Optic	
Driver option	Integral control gear	CIE flux code n°3	100, 99	MacAdam Ellipse	3 SDCM
Driver	Constant current (CC)	Dimming type	On/Off	Lifetime L90B10 (hours)	> 50,700
Input voltage	220-240 V 50/60 Hz	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B10 (hours)	> 63,500
Optic	N, M, W, VW			Lifetime L80B50 (hours)	> 63,500
		Weight	3.7 kg		

ZA-50011



Accessories



Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.