

With a selection of reflectors, and four sizes (10W, 15W, 30W, 45W) from which to choose, the CETI range of downlights are an excellent solution for your general lighting requirements. High-quality SMD LED chips provide accurate colour rendering and colour consistency, while ensuring long luminaire life.



Mechanical

Installation	Recessed
Housing Material	Die-cast Aluminium
Lens Material	Acrylic
Ingress Protection (below)	IP44
Luminaire Diameter	Ø120mm
Luminaire Cutout	Ø112mm
Weight	0.41kg


Electrical

Luminaire Power	15W
Driver Included	Yes
Driver Life	50,000hrs
Voltage Input	230V AC


Light Source

LED Manufacturer	Everlight
LED Series	SMD2835
Beam Angle	70°
Luminaire Lumens	1370lm
Colour Rendition (CRI)	Ra 80
Colour Consistency	SDCM 3
Lifetime	L80 B10 60,000hrs

*Lifetime based on TM-21 reported method only

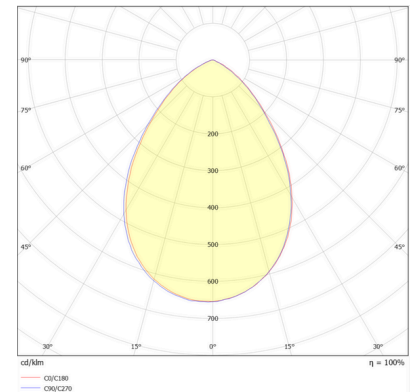

CASAMBI DALI 2



Luminaire Options

Luminaire	Code	CCT	Code	Reflector	Code	Colour	Code	Control	Code
Ceti 2	CI-3028	2700K	827	Matt Silver	MS	White	W	Triac	T
		3000K	830	Bright Silver	BS	Black	B	DALI	D
		4000K	840	Bright Black	BB	Custom	C	Casambi	C

Code Generation

	Luminaire	CCT	Reflector	Colour	Control
Code	CI-3028	840	BS	W	T
Requirements	Ceti 2	4000K	Bright Silver	White	Triac
Complete code = CI-3028-840-BS-W-T					

